



VHX-68D-STD

Dakota Digital VHX Instrument Installation
For 1968-70 Dodge/Plymouth B-Body Non-Rallye

Your new VHX-68D-STD kit includes: **VHX Display**



Universal Sender Pack



Switch Assembly



36" CAT5 Cable

(4) 1/2" Oval Head Screws



(3) 1/2" Pan Head Screws




Control Box

Installation

1. Remove the lower dash pad and switch panel and retain the hardware for reassembly.



2. Remove the factory gauge cluster from the dash; also remove the gauge cluster bezel from the gauge cluster. Retain all factory hardware for reassembly.

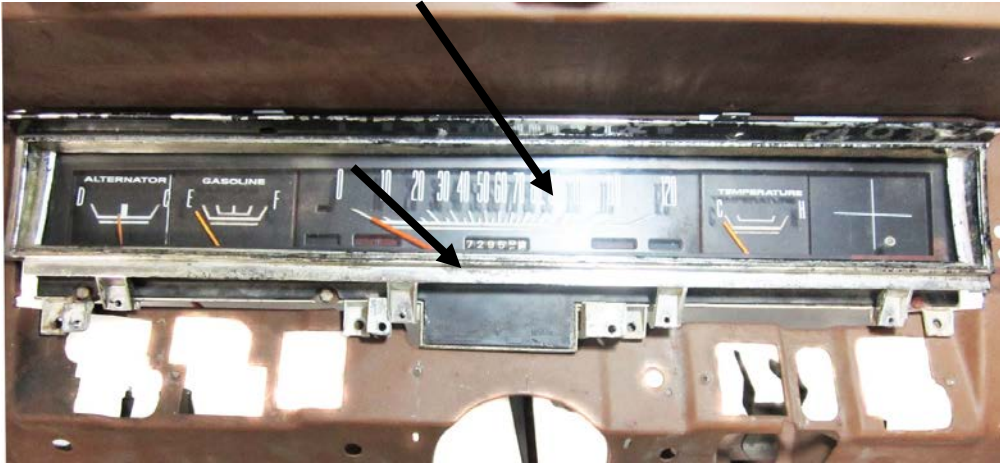


3. Mount the factory gauge bezel to the VHX system by reusing the nine (9) screws that held it to the factory gauge cluster.



4. Attach the provided CAT5 cable to the back of the VHX system and carefully route the open end to the control box mounting location as you mount the VHX system to the dash.



5. Mount the VHX system to the dash using the two (2) factory screws from disassembly for the upper mounts and the provided four (4) oval head screws for the lower mounts.

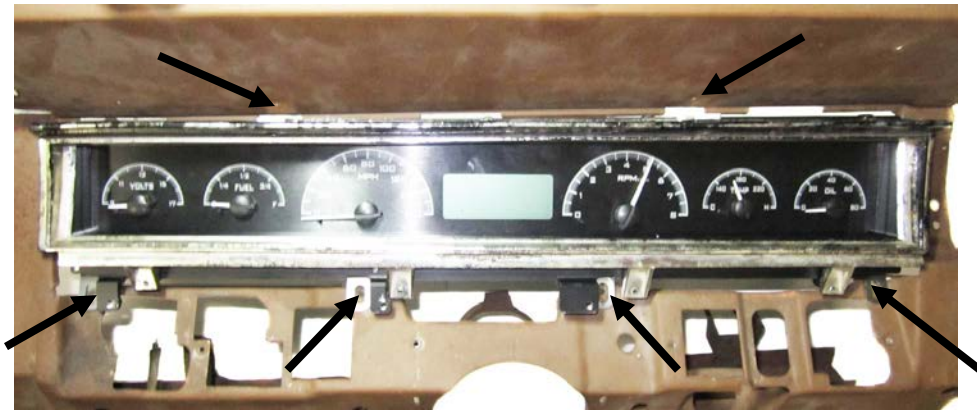

6. Re-install the lower dash pad using the three (3) provided pan head screws. Then mount the switch panel to the dash using the factory hardware from disassembly. Refer to the main manual for wiring instructions to complete the VHX installation.



⚠️WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2018 - Dakota Digital