



VHX-69F-MUS

Dakota Digital VHX Instrument Installation
For 1969-'70 Ford Mustang

Your new VHX-69F-MUS kit includes:

VHX Display




**Universal
Sender Pack**



**Installation
Manuals**



**Ford
Speed Adapter**

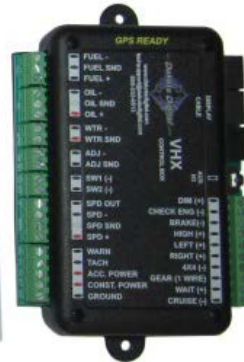

Control Box

**(2) 6-20 x 3/4"
Counter Sunk
screws**

Installation

1. Remove the instrument system from the dashboard. Be sure to save the hardware for reassembly.






2. Remove the stock gauge cluster from the bezel and save the three separator pieces and the hardware for reassembly.

3. Reinstall the three separator pieces onto the bezel.




4. Align the VHX system on the separator pieces and use the stock hardware to secure to the bezel. The bottom two mounts of the Speed and Tach assembly will use the supplied 6-20 x 3/4" counter sunk screws as shown by the oversized arrows.

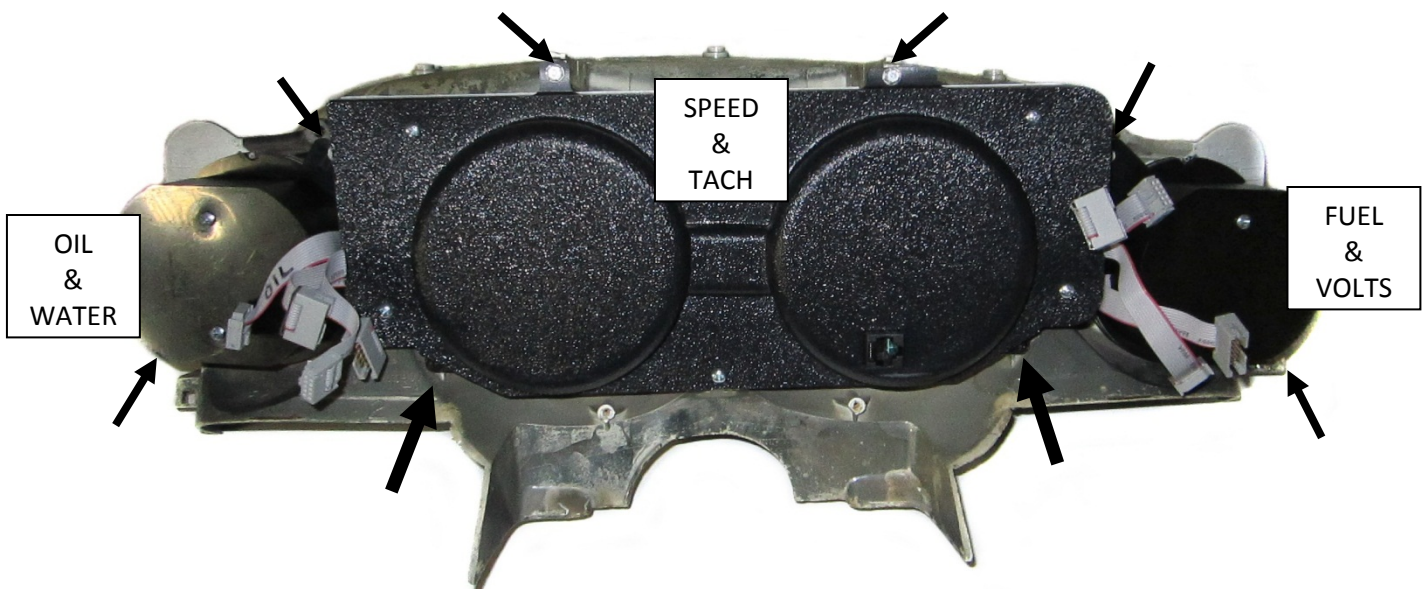

5. With the VHX system mounted to the bezel, the cluster should be secure on all sides with no movement.



7. Connect the ribbon cables with the appropriate labeled connector (black arrows) and also connect the CAT5 cable to the system (white arrow). As the assembled cluster is installed into the dash, take care when routing this cable to the control box to prevent damage.

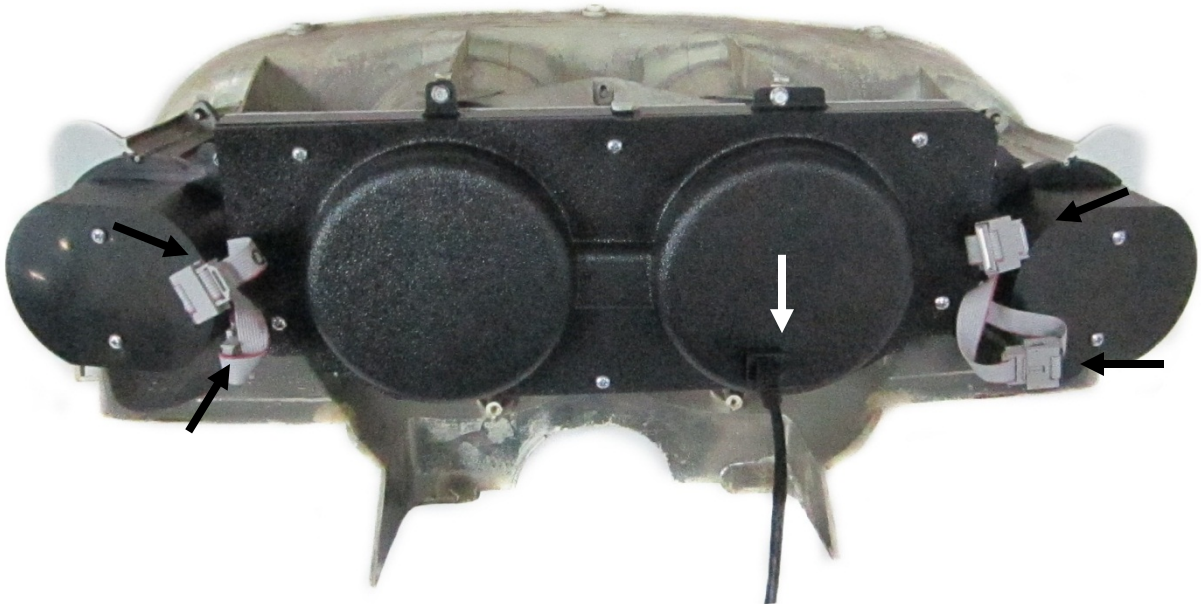

8. Reinstall the cluster into the vehicle using the original hardware and refer to the main manual for wiring instructions to complete the VHX installation.



⚠WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com

dakotasupport@dakotadigital.com Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513
Fax (605) 339-4106