



VHX-70C-CAM

Dakota Digital VHX Instrument Installation
For 1970-'81 Chevy Camaro

Your new VHX-70C-CAM kit includes:

VHX Display



Universal Sender Pack



Switch Assembly



CAT5 Cable



Control Box

Installation

1. First remove the four screws holding the bezel to the dash. These four screws will be re-used for the VHX installation. If you wish to re-use the stock bezel, now is a good time to clean the bezel.




2. Remove the four screws holding the gauges into the dash. These screws will be re-used for the VHX gauge installation.



3. Connect the CAT5 cable to the system. As the assembled cluster is installed into the dash, take care when routing this cable to the control box.



4. Secure the VHX system to the dash with the original four screws.

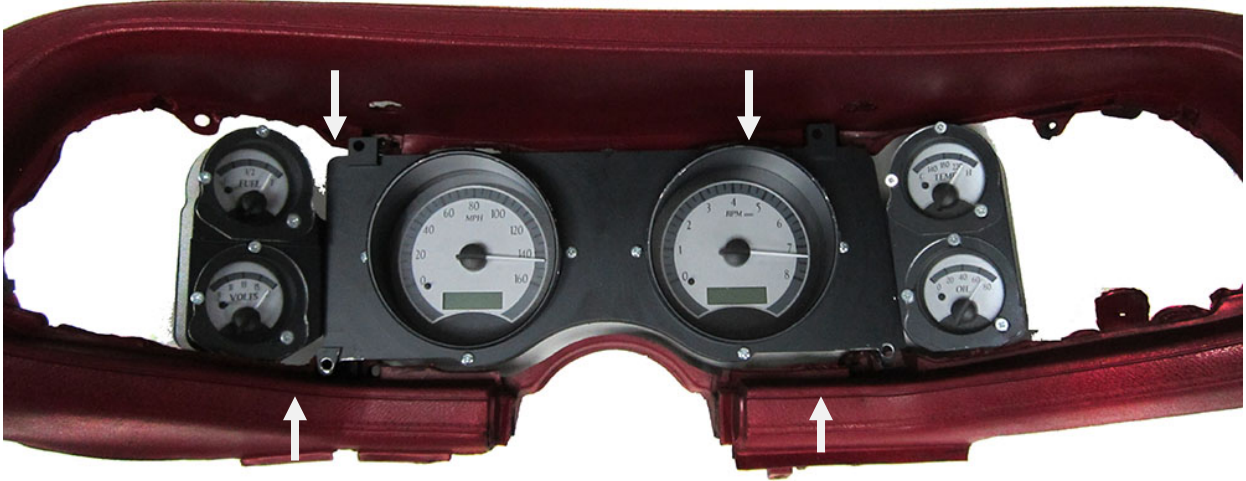

5a. Remove the protective tape from the clear lens and align the bezel with the gauges. Watch carefully as you align the bezel so you don't scratch or damage the lens.



5b. The VHX system should align tightly and the lens should sit flush with the bezel.

- Secure the bezel to the dash with the four original screws. Refer to the main manual for wiring instructions to complete the VHX installation.



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com

dakotasupport@dakotadigital.com Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513
Fax (605) 339-4106