



VHX-700-CUT

Dakota Digital VHX Instrument Installation
For 1970-'72 Oldsmobile Cutlass

Your new VHX-700-CUT kit includes:

VHX Display



Universal Sender Pack



(9) 3/4" Screws



Switch Assembly



Control Box



**(2) 36" CAT5 Cable
(1) 12" CAT5 Cable**




Installation

1. First, remove the stock gauge bezel and gauges from the dash. Retain all factory hardware for reassembly.




Stock Bezel and Gauges Removed

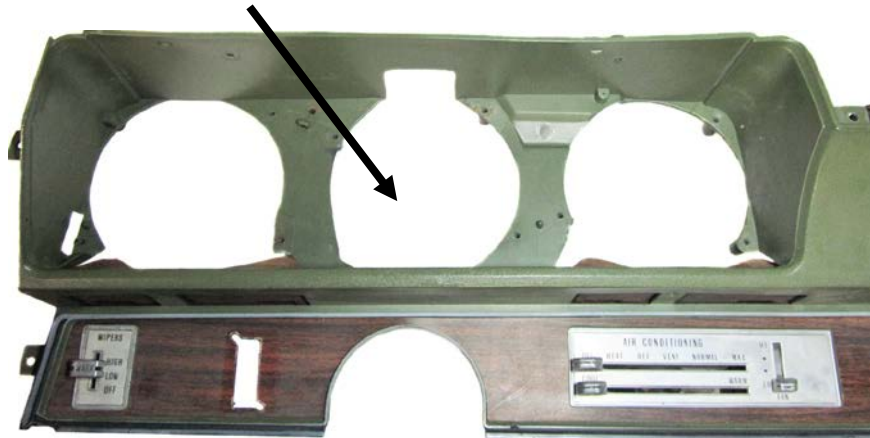

2. With the stock gauges removed, you can now mount the VHX system to the instrument housing by using the nine (9) supplied $\frac{3}{4}$ " screws in the original screw holes.



3. Next, you will need to make connections with the provided CAT5 cables. Attach one end of the provided 36" CAT5 cables to both the back of the VHX system speed and the back of the quad gauge with the other ends carefully routed to the control box mounting location. One end of the 12" CAT5 cable goes to the speed and the other end to the tach.

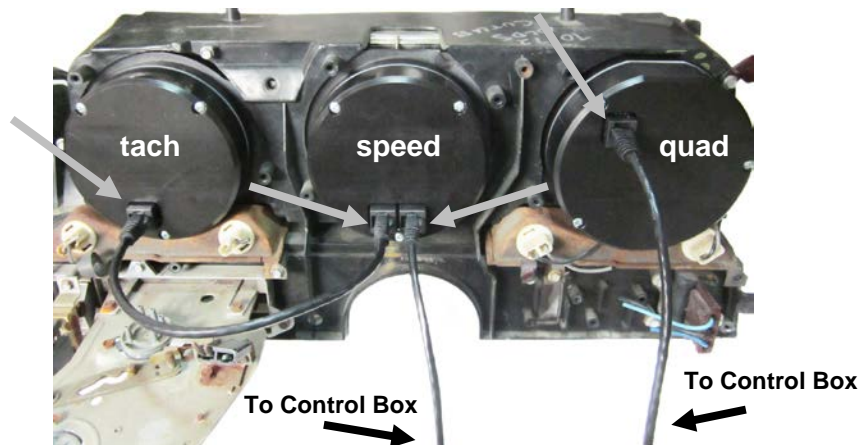

4. Re-install the gauge bezel to the dash housing using the factory hardware and refer to the main manual for wiring instructions to complete the VHX installation.



⚠WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com

dakotasupport@dakotadigital.com Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513
Fax (605) 339-4106