



VHX-73F-PU

Dakota Digital VHX Instrument Installation
For 1973-'79 Ford Pickups

Your new VHX-73F-PU kit includes:

VHX Display



Universal Sender Pack



Switch Assembly

Installation Manuals



36" CAT5 Cable

Ford Speed Adapter




Control Box

Installation

- 1a. First, you will need to remove the stock gauge cluster. To do so, remove the LIGHTS and WIPER knobs as well as the four (4) Phillips screws on the top edge of the bezel as indicated in the photo. Also, disconnect the wiring and speedometer cable on the back side of the gauge cluster. Retain hardware for reassembly.



- 1b. Finally, remove the four (4) mounting screws holding the cluster to the dash. Retain these screws for reassembly.

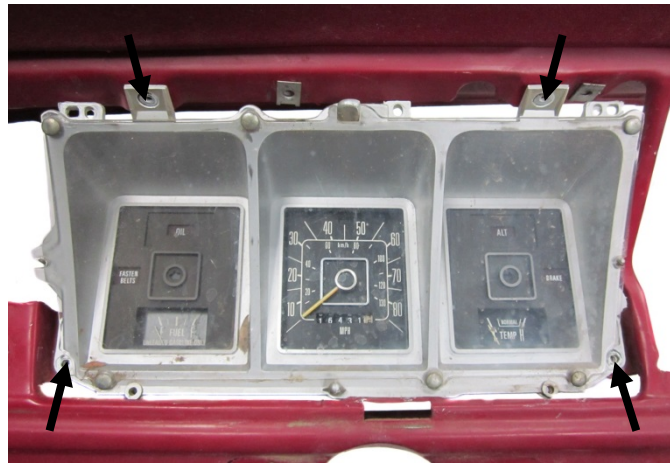

2. Attach the provided 36" CAT5 cable to the back of the VHX system and carefully route the other end to the control box mounting location.

3. Refer to the main manual for wiring instructions and install the VHX cluster in reverse order using all stock hardware to complete the VHX installation.



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2018 - Dakota Digital