



VHX-780-CUT

Dakota Digital VHX Instrument Installation
For 1978-'88 Oldsmobile Cutlass

Your new VHX-780-CUT kit includes:

VHX Display



Universal Sender Pack



Switch Assembly




36" CAT5 Cable



Control Box

Installation

1. First, remove the dash cover to access the stock gauge cluster. There are four (4) screws on the bottom side of the dash cover to be removed. Retain the factory screws for reassembly. Also remove the black plastic spacer in the gauge opening by removing the six (6) screws on the backside of the dash cover.

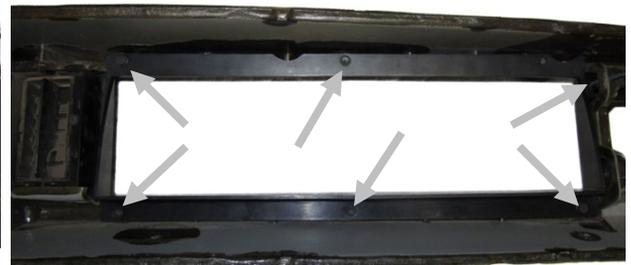

- Remove the four (4) screws that mount the stock gauge cluster while retaining the hardware for reassembly, also disconnect the wiring harnesses, shift indicator cable, and speedometer cable to completely remove the gauge cluster. Make sure the harness is pushed back as to not interfere with the VHX mounting.



- Attach the provided 36" CAT5 cable to the back of the VHX system and carefully route the other end to the control box mounting location.



- Secure the VHX system into the dash using the four (4) stock mounting screws.

- You are now done mounting the VHX system; re-install the dash cover and refer to the main manual for wiring instructions to complete the VHX installation.



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.